

CB200

COOLANT BOWSER

- 200 LITRE CAPACITY
- FLUID LEVEL INDICATOR
SIGHT GLASS
- AIR OPERATED
- FAST FLOW RATE – 100 L/M
- TRIGGER OPERATED
DELIVERY GUN




COOLANT DISPENSING
RATE



COMPRESSED AIR
SUPPLY REQUIRED

CB200 - COOLANT BOWSER

DIMENSIONS

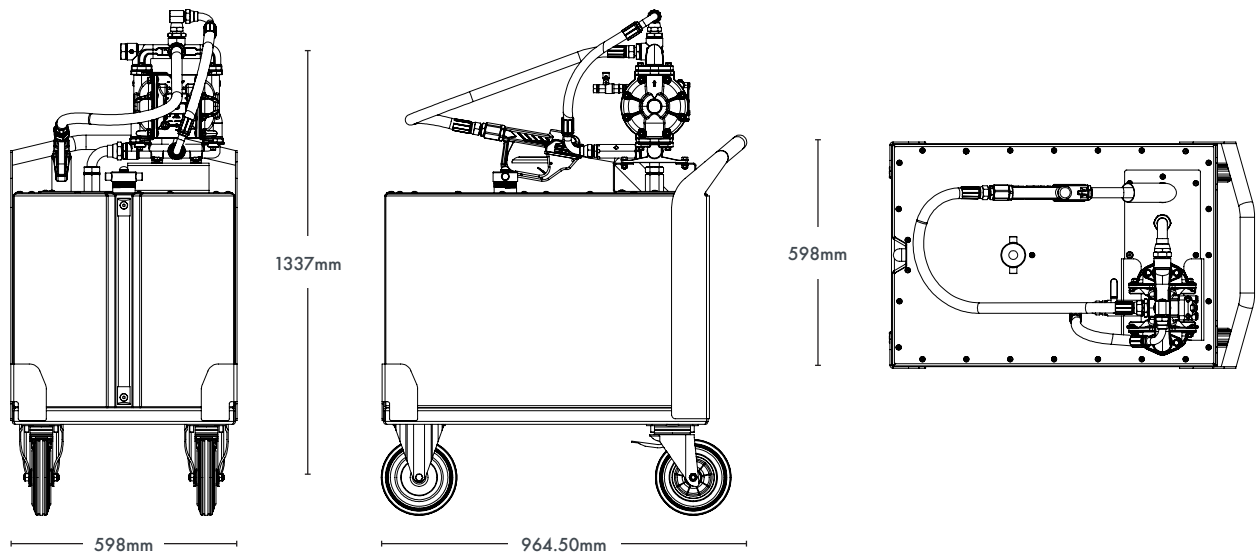

FEATURES

- AIR OPERATED PUMP
- LOW ROLLING RESISTANCE SWIVEL CASTORS WITH FOOT BRAKE
- LIQUID LEVEL INDICATOR SIGHT GLASS

RESULTS

- SAFE TRANSPORT OF FLUID AROUND THE WORKSHOP - NO SPILLS, NO MANUAL HANDLING RISK
- HEALTH AND SAFETY BENEFITS
- IMPROVED PRODUCTIVITY



TECHNICAL SPECIFICATIONS

SERVICES REQUIRED

COMPRESSED AIR REGULATED AT A MAXIMUM OF 8 BAR

FLUID FLOW RATE (L/M)	100 L/M		
NOISE LEVEL (DB)	82		
DIMENSIONS (MM)	H: 1337	W: 598	L: 964.50
WEIGHT (KG)	84		

ETL FLUID EXPERTS LTD
GRIMBALD CRAG ROAD, KNARESBOROUGH
NORTH YORKSHIRE, HG5 8PY

T +44 (0)1423 522911 E SALES@ETLFE.COM

WWW.ETLFLUIDEXPERTS.COM

THE SPECIFICATION AND PHOTOGRAPHY IS FOR REFERENCE ONLY AND MAY BE SUBJECT TO CHANGE.
V09-29-10-25-GB / © ETL FLUID EXPERTS LTD. ALL RIGHTS RESERVED.

