


2S-500B

MOBILE OFFLINE FILTER SYSTEM



DIMENSIONS

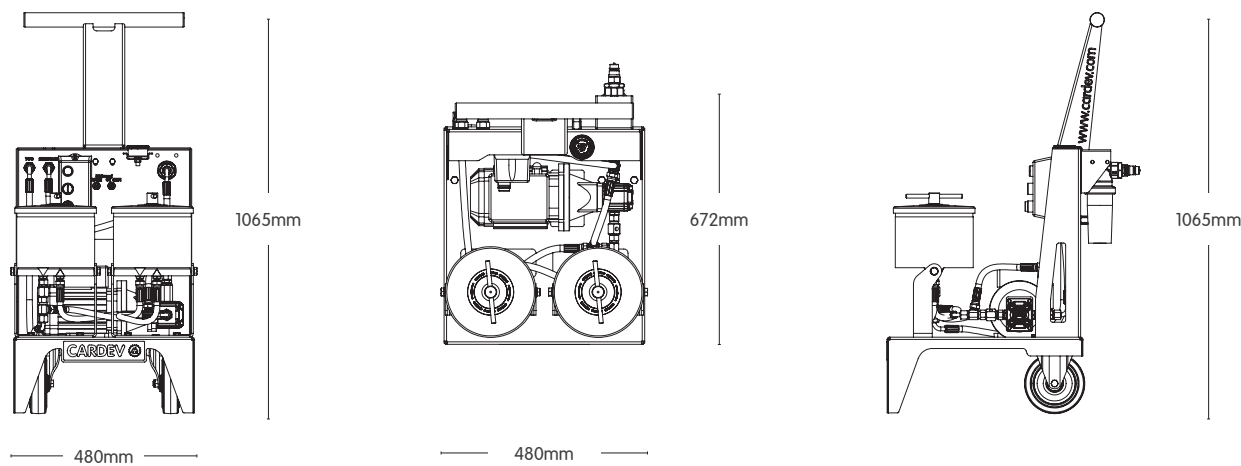

FEATURES

- Simple controls
- Over-pressure protection
- Integrated sample points

BENEFITS

- Removes microparticles
- Removes free and dissolved water contamination
- Increases system reliability
- Prevents system corrosion
- Reduces component wear
- Extends oil life and generates CO₂ saving
- Reduces operating costs

APPLICATION EXAMPLES

Suitable for the following Industrial applications:

- Power generation
- Plastic moulding
- Cement Industry
- Manufacturing plants
- Service workshops

Max Op Temp	IP Rating	Flow Rate (l/h)	Pump Suction Lift	Voltage	Current Draw	Power	Dimensions (mm)		Weight (kg)	Filter Element Type	Retention Capacity (per set)	
							H	W				
60°C	IP55	220	Self-priming to 5.5 metres	230V	110V	≤ 6.5 Amps	1065	480	52	Standard fit: 2 x SDFC	≤ 5 kg Dirt	≤ 1.56 Litres of water
					230V	≤ 3.0 Amps						
					400V	≤ 1.5 Amps	L					
							672					

Note: Flow rates, oil cleanliness levels and moisture removal results are based on ISO VG 46 Mineral Oil @ 40°C

ETL FLUID EXPERTS LTD
GRIMBALD CRAG ROAD,
KNARESBOROUGH
NORTH YORKSHIRE, HG5 8PY

T +44 (0)1423 522911 E SALES@ETLFE.COM

WWW.ETLFLUIDEXPERTS.COM

THE SPECIFICATION AND PHOTOGRAPHY IS FOR REFERENCE ONLY AND MAY BE SUBJECT TO CHANGE.
V03-13-02-24-GB / © ETL FLUID EXPERTS LTD. ALL RIGHTS RESERVED.

